


# TACTILE CLASSIC YELLOW URETHANE



<b>TYPE</b>	Tactile
<b>RANGE</b>	Directional Tactile
<b>DESIGN</b>	Classic
<b>MATERIAL</b>	UV stabilised thermo plastic urethane (TPU)
<b>FINISH</b>	Injection moulded

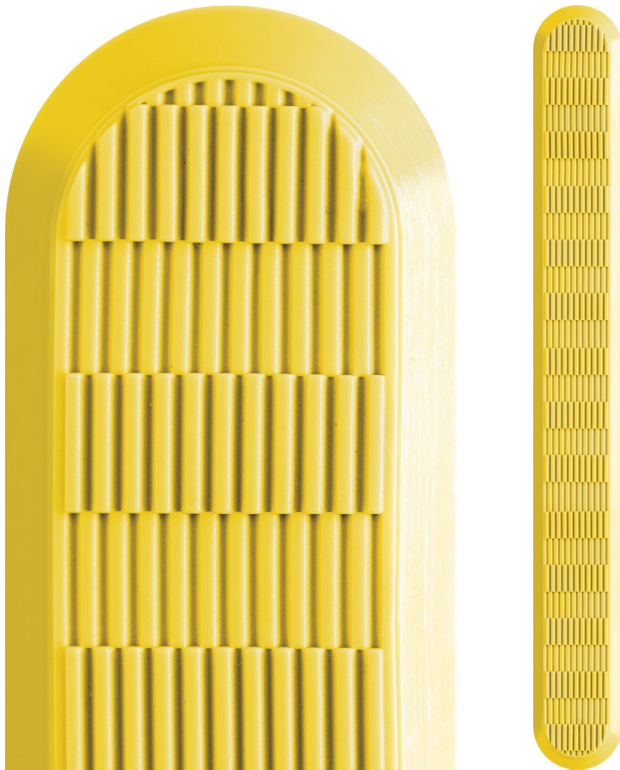

## FEATURES

Injection moulded, undulating groove design on the horizontal face with a smooth outer edge

Not intended for use on ramps with an incline greater than 12.5° (1:8)

Designed to comply with AS/NZS 1428.4.1 (Section 3.2 Directional TGSIs)

Complies with the NCC (D3.8 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

Registered design, Patent pending

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

**TEST** AS 4586 APPENDIX A: Wet Pendulum Test

**FOUR S 96 SLIDER** = 50 **CLASS** = P4

**TRL 55 SLIDER** = 42 **CLASS** = P4

**TEST** AS 4586 APPENDIX B: Dry Floor Friction Test

**MEAN COF** = 0.85 **CLASS** = D1

**TEST** AS 4586 APPENDIX C: Wet/Barefoot Ramp Test

**MEAN ANGLE OF INCLINATION** = 20° **CLASS** = B

**TEST** AS 4586 APPENDIX D: Oil/Wet Ramp Test

**CORRECTED MEAN OVERALL ACCEPTANCE ANGLE** = 11° **CLASS** = R10

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSIs, see: AS/NZS 1428.4.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS/NZS 1428.4.1 Appendix E.

**TEST** AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3

**LUMINANCE REFLECTANCE RATING / WET** = 51.1

**LUMINANCE REFLECTANCE RATING / DRY** = 50.7

DTAC PTY LTD  
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court  
Port Melbourne Victoria  
Australia 3207

PO Box 5059  
South Melbourne Victoria  
Australia 3205

T 1300 793 478  
F 1300 780 628


estimating@dtac.com.au  
www.dtac.com.au

© DTAC Pty Ltd 2018

# TACTILE CLASSIC YELLOW

## INSTALLATION & APPLICATION

**SUBSTRATE** Stone / Masonry / Timber / Vinyl




**CODE** DIRP0705Y

**FIXING** Drill and pressure fit

**NOTE** Any thick substrate  
where maximum hold is  
required without chemical  
anchoring

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals




**CODE** DIRP0705Y

**FIXING** Diamond core/pressure fit

**NOTE** Any thick or thin non  
drillable substrate

**SIDE PROFILE**



**SIZE** L290 x W35 x H5mm