


INTEGRATED TACTILE CLASSIC BLACK TOP STAINLESS STEEL (316)



TYPE	Tactile Ground Surface Indicator
RANGE	Integrated Tactile
DESIGN	Classic Black Top
MATERIAL	316 marine grade stainless steel with silicon carbide infill
FINISH	Machined
DIMENSIONS	DIT0030 - H300 x W300
	DIT0040 - H300 x W600
	DIT0090 - H100 x W300
	DIT0100 - H100 x W600

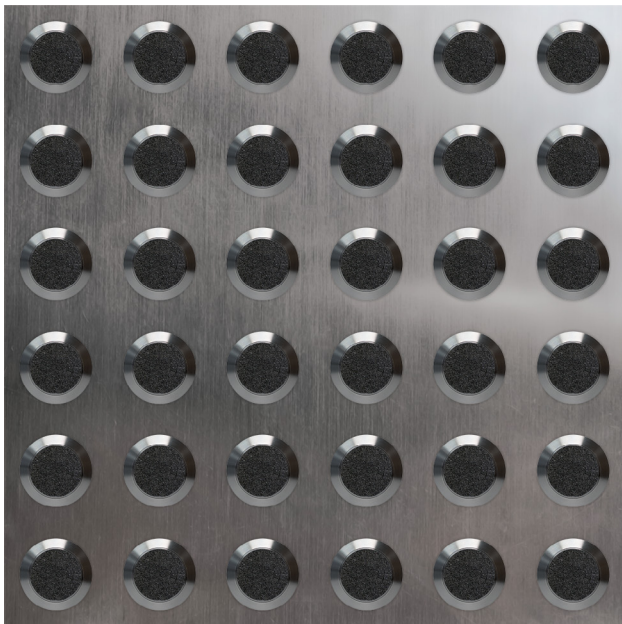

FEATURES

Hard wearing, silicon carbide inserted into the horizontal face with a smooth machined outer edge, tactiles are affixed to a solid plate as a single complete unit

Complies with the NCC (D3.8 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 85 CLASS = P5
TRL 55 SLIDER	= 85 CLASS = P5

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSI, see: AS/NZS 1428.4.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS/NZS 1428.4.1 Appendix E.

TOP OF TACTILE	AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3
LUMINANCE REFLECTANCE RATING / WET	= 4.7
LUMINANCE REFLECTANCE RATING / DRY	= 4.9
BACKING PLATE	AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3
LUMINANCE REFLECTANCE RATING / WET	= 46.2
LUMINANCE REFLECTANCE RATING / DRY	= 47.0

DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

PO Box 5059
South Melbourne Victoria
Australia 3205


T 1300 793 478
F 1300 780 628

estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2023

INTEGRATED TACTILE CLASSIC BLACK TOP INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl

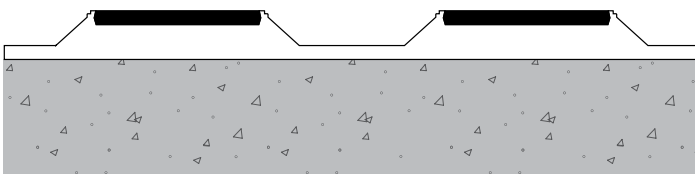

CODE DIT0030 / DIT0040

FIXING Drill and screw or direct stick

NOTE Installed on top of or installed in an existing recess made to suit the tile size. Custom plate sizes available.

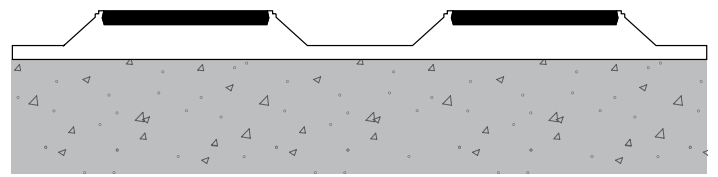


CODE DIT0090 / DIT0100

FIXING Drill and screw or direct stick

NOTE Installed on top of or installed in an existing recess made to suit the tile size. Custom plate sizes available.


SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals

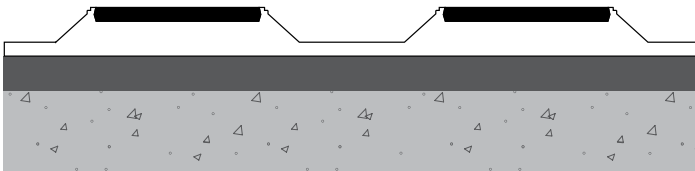

CODE DIT0030 / DIT0040

FIXING Drill and screw or direct stick

NOTE Installed on top of, or recessed into, any non-drillable substrate that cannot be removed or are too fragile including undulating surfaces such as checker plate, escalator covers or uneven floors. Custom plate sizes available.

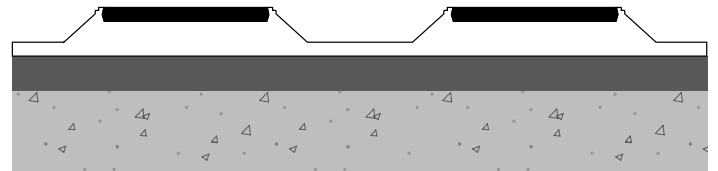


CODE DIT0090 / DIT0100

FIXING Drill and screw or direct stick

NOTE Installed on top of, or recessed into, any non-drillable substrate that cannot be removed or are too fragile including undulating surfaces such as checker plate, escalator covers or uneven floors. Custom plate sizes available.


SUBSTRATE Carpet / Carpet Tiles

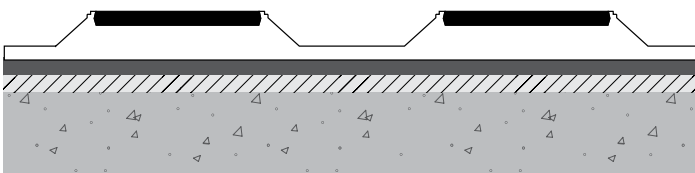

CODE DIT0030 / DIT0040

FIXING Drill and screw

NOTE Installed on top of, or recessed into, any existing carpet substrate that cannot be removed including steel access floors. Custom plate sizes available.

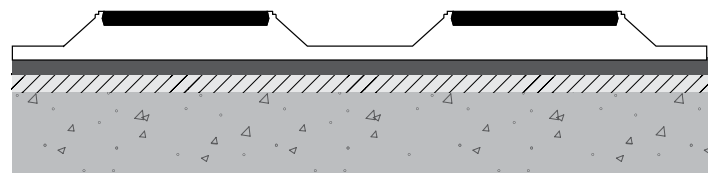

CODE DIT0090 / DIT0100

FIXING Drill and screw

NOTE Installed on top of, or recessed into, any existing carpet substrate that cannot be removed including steel access floors. Custom plate sizes available.