


# PEMKO® STITCH EDGING (10x50x3mm)

P5  
GRIP

## PRODUCT CODES: DESCRIPTION:

DE0410C	NATURAL ANODISED
DE0410B	BLACK ANODISED

RANGE	Stair Nosing & Edging
DESIGN	Stitch
MATERIAL	6063 T5 extruded aluminium alloy
LOCATION	Indoor and Outdoor

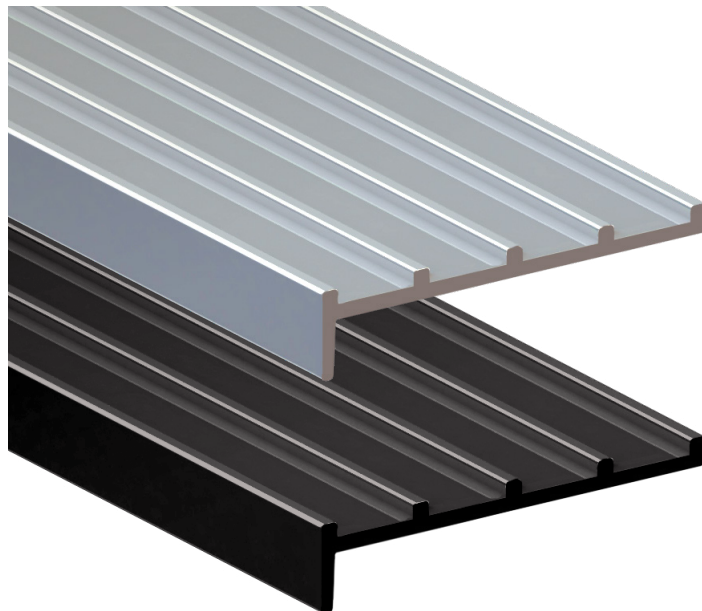

## FEATURES & BENEFITS

- Extruded continuous stitch pattern designed by DTAC in Australia
- Available in exclusive premium quality flat or angle profiles
- Suitable for all stable finished indoor and outdoor surfaces and substrates
- Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions
- Complies with slip resistance requirements as detailed in HB 198

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 61 CLASS = P5
TRL 55 SLIDER	= 56 CLASS = P5
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 0.55 CLASS = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= 31° CLASS = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 13.1° CLASS = R10

## LUMINANCE TESTING


Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
NATURAL	
LIGHT REFLECTANCE VALUE / WET	= 60.0
LIGHT REFLECTANCE VALUE / DRY	= 58.0
BLACK	
LIGHT REFLECTANCE VALUE / WET	= 5.1
LIGHT REFLECTANCE VALUE / DRY	= 5.7

# PEMKO® STITCH EDGING (10x50x3mm) FINISHES & SIZES

## AVAILABLE SIZES

### HARD NATURAL ANODISED



**CODE** DE0410C

**SIZE** H10 x W50 x T3 - L3200mm

### HARD BLACK ANODISED



**CODE** DE0410B

**SIZE** H10 x W50 x T3 - L3200mm

## AVAILABLE FINISHES

### HARD NATURAL ANODISED (25µm)




### HARD BLACK ANODISED (40µm)



# PEMKO® STITCH EDGING (10x50x3mm) INSTALLATION & APPLICATION


**SUBSTRATE** Stone / Masonry / Timber / Vinyl



**CODE** DE0410C / DE0410B

**FIXING** Adhesive

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals



**CODE** DE0410C / DE0410B

**FIXING** Adhesive

**NOTE** *Ensure grout line is  
discrete as illustrated*