


# PEMKO® EDGING SUEDE HARD ANODISED ALUMINIUM



<b>TYPE</b>	Edging
<b>RANGE</b>	Designer Stair Edging
<b>DESIGN</b>	Suede
<b>MATERIAL</b>	6063 T5 extruded aluminium alloy
<b>FINISH</b>	Hard anodised

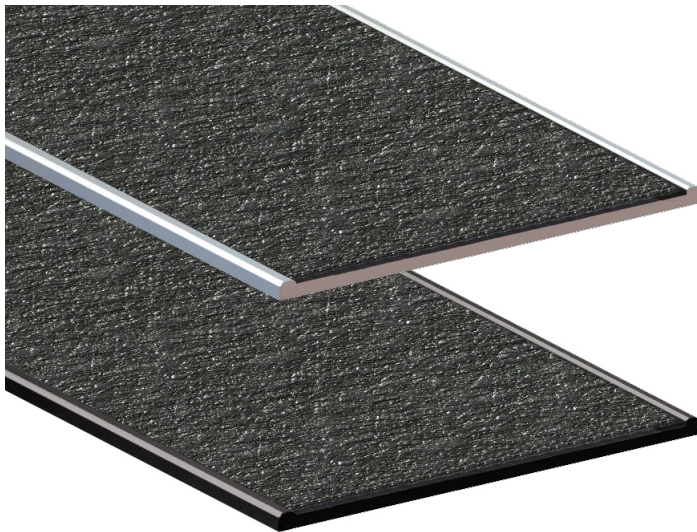

## FEATURES

Extruded continuous band of resilient slip resistance inserted into cavities designed by DTAC in Australia

Available in exclusive premium quality flat, angle or carpet profiles

Suitable for all stable finished indoor surfaces and substrates only

Complies with the NCC (D3.3 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

**TEST** AS 4586 APPENDIX A: Wet Pendulum Test

**FOUR S 96 SLIDER** = 78 **CLASS** = P5

**TRL 55 SLIDER** = 96 **CLASS** = P5

**TEST** AS 4586 APPENDIX B: Dry Floor Friction Test

**MEAN COF** = 1.05 **CLASS** = D1

**TEST** AS 4586 APPENDIX C: Wet/Barefoot Ramp Test

**MEAN ANGLE OF INCLINATION** = >35° **CLASS** = C

**TEST** AS 4586 APPENDIX D: Oil/Wet Ramp Test

**CORRECTED MEAN OVERALL ACCEPTANCE ANGLE** = >35° **CLASS** = R13

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1 Appendix B.

**TEST** AS 1428.1 APPENDIX B PARAGRAPH B3

### NATURAL

**LUMINANCE REFLECTANCE RATING / WET** = 4.1

**LUMINANCE REFLECTANCE RATING / DRY** = 4.3

### BLACK

**LUMINANCE REFLECTANCE RATING / WET** = 4.1

**LUMINANCE REFLECTANCE RATING / DRY** = 4.3

DTAC PTY LTD  
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court  
Port Melbourne Victoria  
Australia 3207

T 1300 793 478  
F 1300 780 628

PO Box 5059  
South Melbourne Victoria  
Australia 3205


estimating@dtac.com.au  
www.dtac.com.au

© DTAC Pty Ltd 2020

# PEMKO® EDGING SUEDE FINISHES & SIZES

## DESIGNER STAIR EDGING - AVAILABLE SIZES

### HARD NATURAL ANODISED



CODE DE0500C


SIZE W55 x T3 - L3200

### HARD BLACK ANODISED



CODE DE0500B

SIZE W55 x T3 - L3200



CODE DE0510C

SIZE H10 x W55 x T3 - L2500



CODE DE0510B

SIZE H10 x W55 x T3 - L3200

## AVAILABLE FINISHES


### HARD NATURAL ANODISED (25µm)



### HARD BLACK ANODISED (40µm)



## STAIR EDGING SYSTEMS FOR CARPET - AVAILABLE SIZES

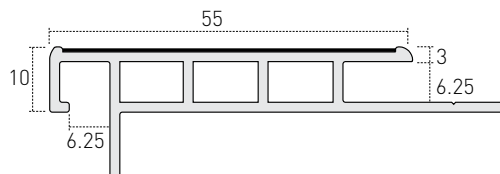


Registered Design

CODE DE0660C

SIZE H10 x W55 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends




Escutcheon Plate

CODE DESC01


SIZE H10 x W50 x T2.5

# PEMKO® EDGING SUEDE INSTALLATION & APPLICATION

**SUBSTRATE** Stone / Masonry / Timber / Vinyl



**FIXING** Adhesive



**FIXING** Adhesive

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals



**FIXING** Adhesive


*NOTE* Ensure grout line is discrete as illustrated



**FIXING** Adhesive

*NOTE* Ensure grout line is discrete as illustrated

**SUBSTRATE** Carpet / Carpet Tiles

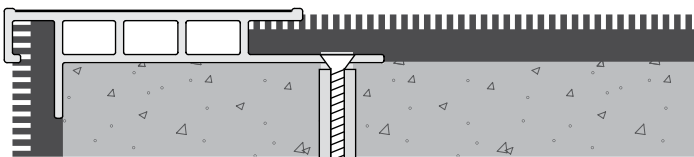

**FIXING** Screw-fixed or adhesive (screws and plugs supplied)

*NOTE* DTAC screw-fix mounting methods are available on request