


# ECOTAC™ CLASSIC STAINLESS STEEL (316)



<b>TYPE</b>	Tactile
<b>RANGE</b>	Directional Tactile
<b>DESIGN</b>	Classic Ecotac™
<b>MATERIAL</b>	316 marine grade stainless steel
<b>FINISH</b>	Machined

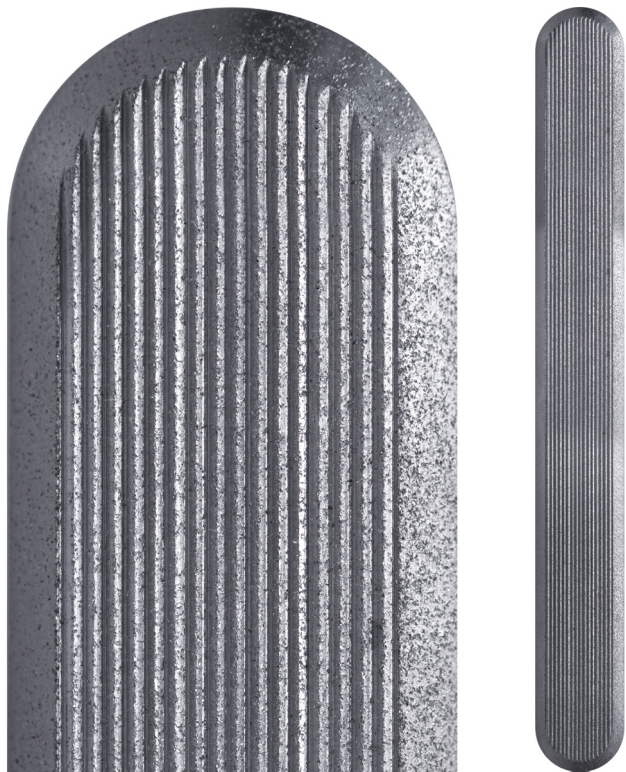

## FEATURES

Machined, grooved design on the horizontal face with a smooth outer edge

An environmentally friendly alternative to the solid directional tactile, featuring a cupped underside that uses less stainless steel putting less demand on resources

Identical to the DTAC solid tactile when installed

Designed to comply with AS/NZS 1428.4.1 (Section 3.2 Directional TGSIs)

Complies with the NCC (D3.8 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

Registered design

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

**TEST** AS 4586 APPENDIX A: Wet Pendulum Test

**FOUR S 96 SLIDER** = 60 **CLASS** = P5

**TRL 55 SLIDER** = 74 **CLASS** = P5

**TEST** AS 4586 APPENDIX B: Dry Floor Friction Test

**MEAN COF** = 0.90 **CLASS** = D1

**TEST** AS 4586 APPENDIX C: Wet/Barefoot Ramp Test

**MEAN ANGLE OF INCLINATION** = >35° **CLASS** = C

**TEST** AS 4586 APPENDIX D: Oil/Wet Ramp Test

**CORRECTED MEAN OVERALL ACCEPTANCE ANGLE** = >35° **CLASS** = R13

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSi, see: AS/NZS 1428.4.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS/NZS 1428.4.1 Appendix E.

**TEST** AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3

**LUMINANCE REFLECTANCE RATING / WET** = 26.5

**LUMINANCE REFLECTANCE RATING / DRY** = 33.5

DTAC PTY LTD  
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court  
Port Melbourne Victoria  
Australia 3207

PO Box 5059  
South Melbourne Victoria  
Australia 3205

T 1300 793 478  
F 1300 780 628


estimating@dtac.com.au  
www.dtac.com.au

© DTAC Pty Ltd 2018

# ECOTAC™ CLASSIC

## INSTALLATION & APPLICATION

**SUBSTRATE** Stone / Masonry / Timber / Vinyl




**CODE** DIR0120

**FIXING** Drill and pressure fit

**NOTE** Any thick substrate where maximum hold is required without chemical anchoring

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals




**CODE** DIR0120

**FIXING** Diamond core/pressure fit

**NOTE** Any thick or thin non drillable substrate

**SIDE PROFILE**

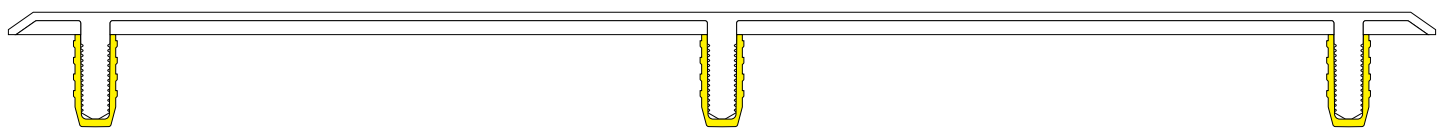

**SIZE** L290 x W35 x H5mm