


ECOTAC™ TERRACED STAINLESS STEEL (316)



TYPE	Tactile
RANGE	Directional Tactile
DESIGN	Terraced Ecotac™
MATERIAL	316 marine grade stainless steel
FINISH	Machined

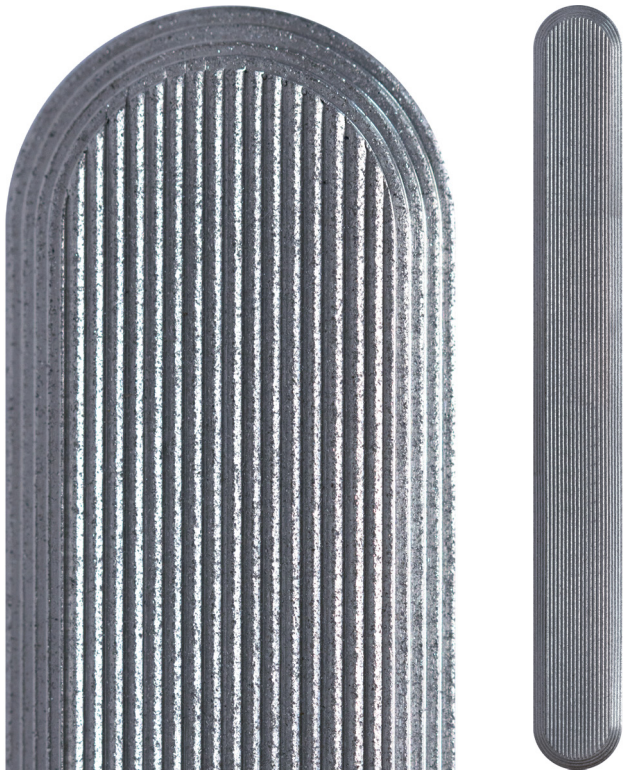

FEATURES

Machined, grooved design on the horizontal face with a terraced slip resistant outer edge

An environmentally friendly alternative to the solid directional tactile, featuring a cupped underside that uses less stainless steel putting less demand on resources

Identical to the DTAC solid tactile when installed

Designed to comply with AS/NZS 1428.4.1 (Section 3.2 Directional TGSI's)

Complies with the NCC (D3.8 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

Registered design

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST AS 4586 APPENDIX A: Wet Pendulum Test

FOUR S 96 SLIDER = 61 **CLASS** = P5

TRL 55 SLIDER = 70 **CLASS** = P5

TEST AS 4586 APPENDIX B: Dry Floor Friction Test

MEAN COF = 0.90 **CLASS** = D1

TEST AS 4586 APPENDIX C: Wet/Barefoot Ramp Test

MEAN ANGLE OF INCLINATION = >35° **CLASS** = C

TEST AS 4586 APPENDIX D: Oil/Wet Ramp Test

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE = >35° **CLASS** = R13

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSi, see: AS/NZS 1428.4.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS/NZS 1428.4.1 Appendix E.

TEST AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3

LUMINANCE REFLECTANCE RATING / WET = 26.1

LUMINANCE REFLECTANCE RATING / DRY = 33.9

DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

PO Box 5059
South Melbourne Victoria
Australia 3205


T 1300 793 478
F 1300 780 628

estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2018

ECOTAC™ TERRACED INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl




CODE DIR0130

FIXING Drill and pressure fit

NOTE Any thick substrate where maximum hold is required without chemical anchoring

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals




CODE DIR0130

FIXING Diamond core/pressure fit

NOTE Any thick or thin non drillable substrate

SIDE PROFILE

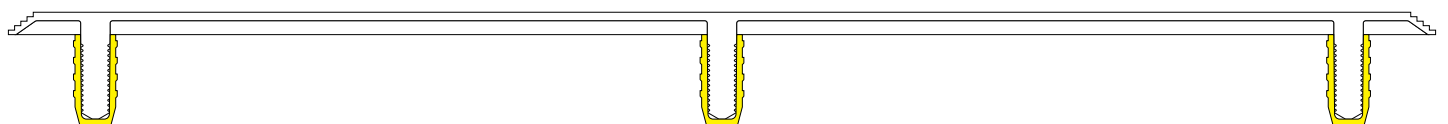

SIZE L290 x W35 x H5mm