


# PEMKO® CORDUROY EDGING (50x3mm)

**P5  
GRIP**

## PRODUCT CODES: DESCRIPTION:

<b>DE0100C</b>	<b>NATURAL ANODISED</b>
<b>DE0100B</b>	<b>BLACK ANODISED</b>
<b>DE0100G</b>	<b>GOLD ANODISED</b>
<b>DE0101G</b>	<b>BRIGHT GOLD ANODISED</b>
<b>DE0102G</b>	<b>BRONZED GOLD ANODISED</b>

<b>RANGE</b>	Stair Nosing & Edging
<b>DESIGN</b>	Corduroy
<b>MATERIAL</b>	6063 T5 extruded aluminium alloy
<b>LOCATION</b>	Indoor or outdoor

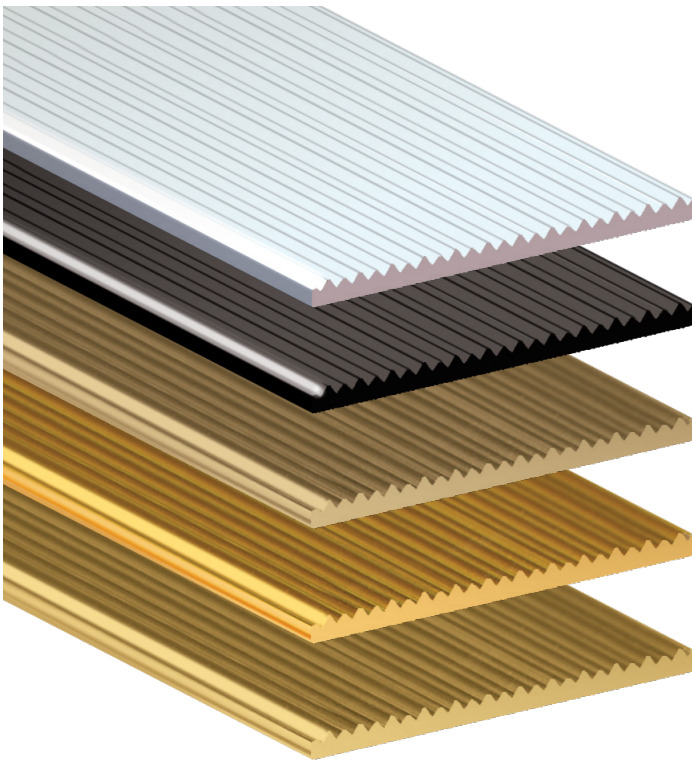

## FEATURES & BENEFITS

- Extruded continuous corduroy pattern designed by DTAC in Australia
- Available in exclusive premium quality flat, angle or carpet profiles
- Suitable for all stable finished indoor or outdoor surfaces and substrates
- Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions
- Complies with slip resistance requirements as detailed in HB 198
- Registered Australian design

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

<b>TEST</b>	AS 4586 APPENDIX A: Wet Pendulum Test
<b>FOUR S 96 SLIDER</b>	= 63 <b>CLASS</b> = P5
<b>TRL 55 SLIDER</b>	= 66 <b>CLASS</b> = P5
<b>TEST</b>	AS 4586 APPENDIX B: Dry Floor Friction Test
<b>MEAN COF</b>	= 0.55 <b>CLASS</b> = D1
<b>TEST</b>	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
<b>MEAN ANGLE OF INCLINATION</b>	= 33° <b>CLASS</b> = C
<b>TEST</b>	AS 4586 APPENDIX D: Oil/Wet Ramp Test
<b>CORRECTED MEAN OVERALL ACCEPTANCE ANGLE</b>	= 31.7° <b>CLASS</b> = R12

## LUMINANCE TESTING


Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

<b>TEST</b>	AS 1428.1 APPENDIX B PARAGRAPH B3
<b>NATURAL</b>	
<b>LIGHT REFLECTANCE VALUE / WET</b>	= 42.3
<b>LIGHT REFLECTANCE VALUE / DRY</b>	= 41.4
<b>BLACK</b>	
<b>LIGHT REFLECTANCE VALUE / WET</b>	= 2.8
<b>LIGHT REFLECTANCE VALUE / DRY</b>	= 3.4
<b>GOLD</b>	
<b>LIGHT REFLECTANCE VALUE / WET</b>	= 31.3
<b>LIGHT REFLECTANCE VALUE / DRY</b>	= 32.3
<b>BRIGHT GOLD</b>	
<b>LIGHT REFLECTANCE VALUE / WET</b>	= 37.6
<b>LIGHT REFLECTANCE VALUE / DRY</b>	= 39.5
<b>BRONZED GOLD</b>	
<b>LIGHT REFLECTANCE VALUE / WET</b>	= 23.5
<b>LIGHT REFLECTANCE VALUE / DRY</b>	= 24.4

# PEMKO® CORDUROY EDGING (50x3mm) FINISHES & SIZES

## AVAILABLE SIZES

### HARD NATURAL ANODISED



**CODE** DE0100C  
**SIZE** W50 x T3 - L3200mm

### HARD BLACK ANODISED



**CODE** DE0100B  
**SIZE** W50 x T3 - L3200mm

### GOLD ANODISED



**CODE** DE0100G  
**SIZE** W50 x T3 - L2500mm

### BRIGHT GOLD ANODISED



**CODE** DE0101G  
**SIZE** W50 x T3 - L2500mm

### BRONZED GOLD ANODISED




**CODE** DE0102G  
**SIZE** W50 x T3 - L2500mm

## AVAILABLE FINISHES


### HARD NATURAL ANODISED (25µM)




### HARD BLACK ANODISED (40µM)




### BRIGHT GOLD ANODISED (10µM)



### GOLD ANODISED (10µM)




### BRONZED GOLD ANODISED (10µM)



# PEMKO® CORDUROY EDGING (50x3mm) INSTALLATION & APPLICATION

**SUBSTRATE** Stone / Masonry / Timber / Vinyl



**CODES** DE0100C / DE0100B /  
DE0100G / DE0101G /  
DE0102G

**FIXING** Adhesive

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals



**CODES** DE0100C / DE0100B /  
DE0100G / DE0101G /  
DE0102G

**FIXING** Adhesive

**NOTE** *Ensure grout line is  
discrete as illustrated*

**NOTE** *This installation method is  
not always recommended  
due to the riser tile not  
being level with the tread.  
Flat nosing can be  
installed up to 15mm back  
from the front edge.*