

TACTILE CLASSIC SILICON CARBIDE STAINLESS STEEL (316)



TYPE	Tactile Ground Surface Indicator
RANGE	Directional Tactile
DESIGN	Classic Silicon Carbide
MATERIAL	316 marine grade stainless steel with silicon carbide infill
FINISH	Machined



FEATURES

Hard wearing, silicon carbide inserted into the horizontal face with a smooth machined outer edge

Designed to comply with AS/NZS 1428.4.1 (Section 3.2 Directional TGSIs)

Complies with the NCC (D3.8 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 60 CLASS = P5
TRL 55 SLIDER	= 61 CLASS = P5

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSi, see: AS/NZS 1428.4.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS/NZS 1428.4.1 Appendix E.

TEST	AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3
LUMINANCE REFLECTANCE RATING / WET	= 4.5
LUMINANCE REFLECTANCE RATING / DRY	= 5.4

DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

PO Box 5059
South Melbourne Victoria
Australia 3205


T 1300 793 478
F 1300 780 628

estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2018

TACTILE CLASSIC SILICON CARBIDE INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl




CODE DIR0140

FIXING Drill and pressure fit

NOTE Any thick substrate where maximum hold is required without chemical anchoring

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals




CODE DIR0140

FIXING Diamond core/pressure fit

NOTE Any thick substrate where maximum hold is required without chemical anchoring

SIDE PROFILE

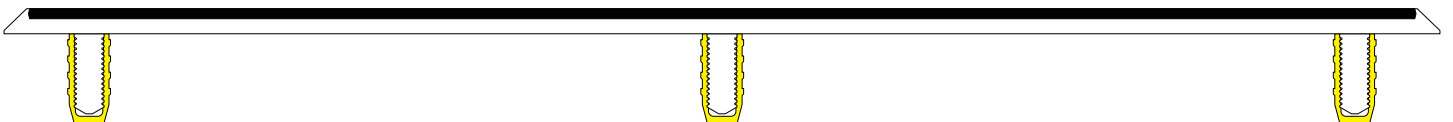

SIZE L290 x W35 x H5mm