

PEMKO® URBAN EDGING (10x65x5mm)

P5
GRIP

PRODUCT CODES: DESCRIPTION:


DE0700BMF	NATURAL ANODISED Black silicon carbide infill
------------------	---

RANGE	Stair Nosing & Edging
--------------	-----------------------

DESIGN	Urban
---------------	-------

MATERIAL	6063 T5 extruded aluminium alloy with silicon carbide infill
-----------------	--

LOCATION	Indoor or outdoor
-----------------	-------------------

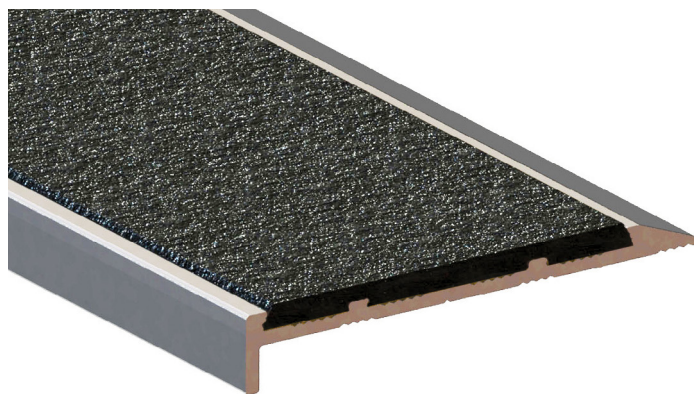

FEATURES & BENEFITS

Continuous band of hard wearing, solid silicon carbide inserted into aluminium extrusions designed by DTAC in Australia

Available in exclusive premium quality angle profiles

Suitable for all stable finished outdoor or indoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
-------------	---------------------------------------

FOUR S 96 SLIDER	= 78 CLASS = P5
-------------------------	------------------------

TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
-------------	---

MEAN COF	= 0.90 CLASS = D1
-----------------	--------------------------

TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
-------------	--

MEAN ANGLE OF INCLINATION	= 36° CLASS = C
----------------------------------	------------------------

TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
-------------	---------------------------------------

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 36° CLASS = R13
--	--------------------------

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
-------------	-----------------------------------

LIGHT REFLECTANCE VALUE / WET	= 3.6
--------------------------------------	-------

LIGHT REFLECTANCE VALUE / DRY	= 3.8
--------------------------------------	-------

PEMKO®

URBAN EDGING

(10x65x5mm)

FINISHES & SIZES

AVAILABLE SIZES

HARD NATURAL ANODISED WITH BLACK INFILL



CODE DE0700BMF

SIZE H10 x W65 x T5 - L3200mm


AVAILABLE FINISHES

HARD NATURAL ANODISED (25µM) WITH BLACK INFILL




PEMKO® URBAN EDGING (10x65x5mm) INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DE0700BMF


FIXING Adhesive.
Optional screw-fix
(Screws* and plugs
available upon request)



CODE DE0700BMF

FIXING Adhesive only


SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0700BMF

FIXING Adhesive.
Optional screw-fix
(Screws* and plugs
available upon request)

NOTE Ensure grout line is
discrete as illustrated



CODE DE0700BMF

FIXING Adhesive only

NOTE Ensure grout line is
discrete as illustrated

* Screw heads will be visible as the
Silicon Carbide Infill is not a
removable item.