


# ULTIMAT® TACTILE CLASSIC WHITE URETHANE



<b>TYPE</b>	Tactile Ground Surface Indicator
<b>RANGE</b>	Integrated Tactile
<b>DESIGN</b>	Classic
<b>MATERIAL</b>	UV stabilised thermo plastic urethane (TPU)
<b>FINISH</b>	Injection moulded
<b>DIMENSIONS</b>	H300 x W300

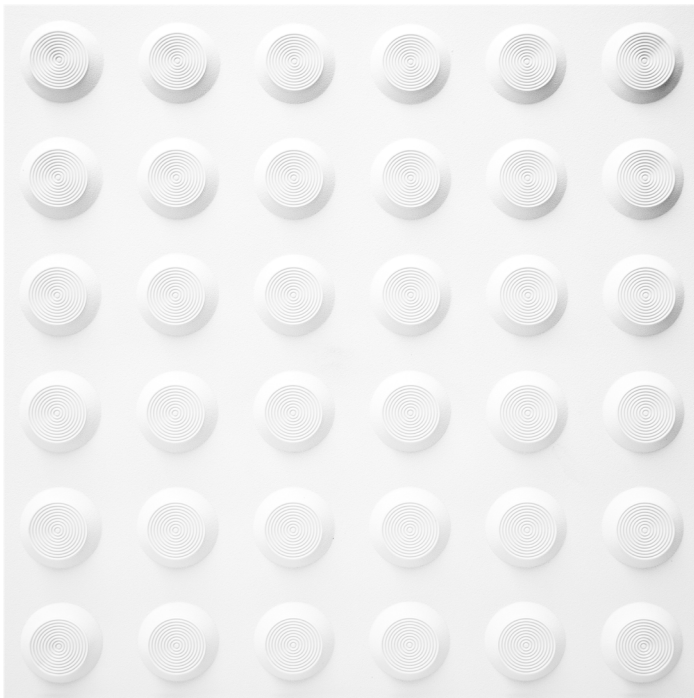

## FEATURES

- Injection moulded as a uniform integrated tactile
- Concentric circle design on the horizontal face with a smooth outer edge
- Complies with the NCC (D3.8 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions
- Complies with slip resistance requirements as detailed in HB 198
- Backed by 2 year warranty

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

<b>TEST</b>	AS 4586 APPENDIX A: Wet Pendulum Test
<b>FOUR S 96 SLIDER</b>	= 71 <b>CLASS</b> = P5
<b>TRL 55 SLIDER</b>	= 66 <b>CLASS</b> = P5
<b>TEST</b>	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
<b>MEAN ANGLE OF INCLINATION</b>	= 20° <b>CLASS</b> = B
<b>TEST</b>	AS 4586 APPENDIX D: Oil/Wet Ramp Test
<b>CORRECTED MEAN OVERALL ACCEPTANCE ANGLE</b>	= 19° <b>CLASS</b> = R11

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSI, see: AS/NZS 1428.4.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS/NZS 1428.4.1 Appendix E.

<b>TEST</b>	AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3
<b>LUMINANCE REFLECTANCE RATING / WET</b>	= 87.0
<b>LUMINANCE REFLECTANCE RATING / DRY</b>	= 86.7

DTAC PTY LTD  
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court  
Port Melbourne Victoria  
Australia 3207

PO Box 5059  
South Melbourne Victoria  
Australia 3205


T 1300 793 478  
F 1300 780 628

estimating@dtac.com.au  
www.dtac.com.au

© DTAC Pty Ltd 2021

# ULTIMAT® TACTILE CLASSIC WHITE APPLICATION

**SUBSTRATE** Stone / Masonry / Timber / Vinyl

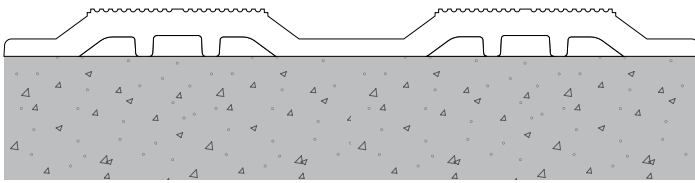


**CODE** DWU0014

**FIXING** Direct stick

**NOTE** Installed on top of or installed in an existing recess made to suit the multiples of the 300 x 300mm tile.

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals

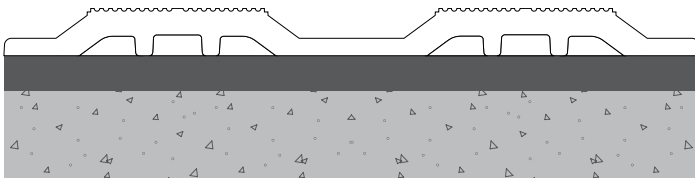

**CODE** DWU0014

**FIXING** Direct stick

**NOTE** Installed on top of or installed in an existing recess made to suit the multiples of the 300 x 300mm tile.