


# PEMKO® THRESHOLD PLATE 150X6 NATURAL ANODISED ALUMINIUM

<b>TYPE</b>	Threshold Plate
<b>RANGE</b>	Pemko® Thresholds & Transition Strips
<b>LOCATION</b>	Door sill
<b>MATERIAL</b>	6063 T5 extruded aluminium alloy
<b>FINISH</b>	Anodised

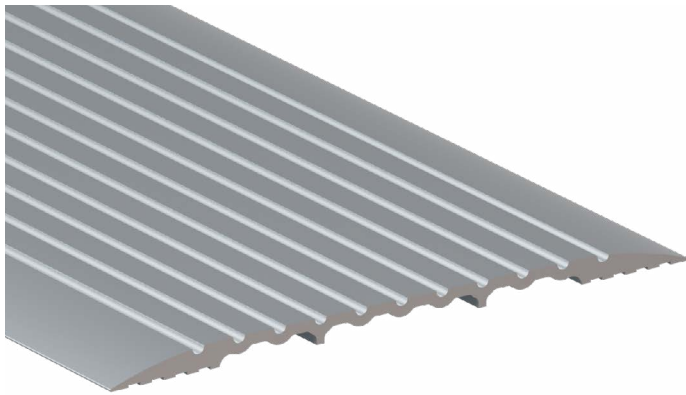

## FEATURES

A low profile, extra wide heavy duty threshold plate that can be used in conjunction with door bottom seals to prevent rain, draughts, noise and smoke infiltration.

Ideal for larger style commercial door frames.

Suitable for door sill applications

Backed by 2 year warranty

## APPROVALS

**UL:** R37913

## ACCESS & MOBILITY

**AUS:** NCC D2.15 & D3.3. AS1428.1

**NZ:** NZ BC Compliance Doc. D1/AS1 1.3.2

**UK/EU:** Approved Document M

## FIRE

**AUS/NZ:** NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1.  
NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.

**UK/EU:** Approved Document B. BS 476 Pt. 20 & 22  
(similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD180

BAL – FZ when used with a BAL rated door bottom seal  
in accordance with AS3959.

DTAC PTY LTD  
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court  
Port Melbourne Victoria  
Australia 3207

T 1300 793 478  
F 1300 780 628


PO Box 5059  
South Melbourne Victoria  
Australia 3205

estimating@dtac.com.au  
www.dtac.com.au

© DTAC Pty Ltd 2021

# PEMKO® THRESHOLD PLATE 150X6 INSTALLATION & APPLICATION


**LOCATION** Door sill

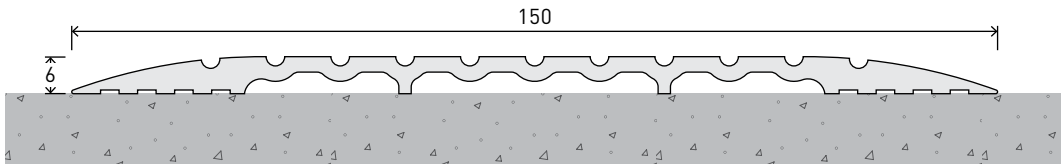

**CODE** DP1371

**SIZE** W150 x H6 - L1000


**FIXING** Screw-fixed or adhesive (screws supplied)

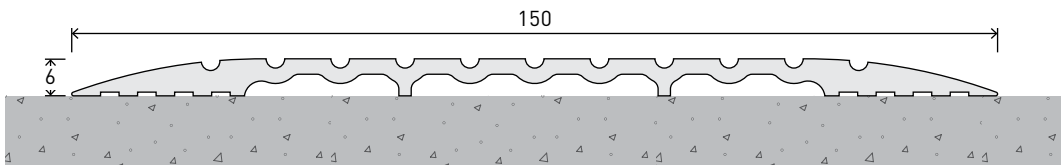

**CODE** DP1372

**SIZE** W150 x H6 - L2000

**FIXING** Screw-fixed or adhesive (screws supplied)

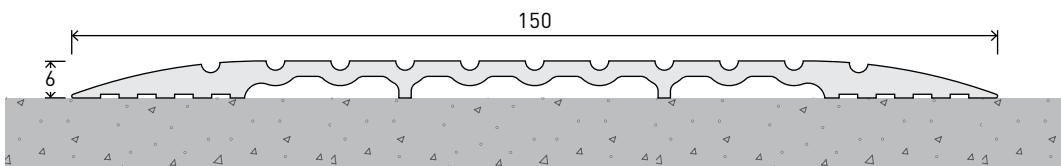

**CODE** DP1373

**SIZE** W150 x H6 - L3000

**FIXING** Screw-fixed or adhesive (screws supplied)