

# PEMKO® THRESHOLD RAMP 100X13 NATURAL ANODISED ALUMINIUM

<b>TYPE</b>	Threshold Ramp
<b>RANGE</b>	Pemko® Thresholds & Transition Strips
<b>LOCATION</b>	Door sill
<b>MATERIAL</b>	6060 T5 extruded aluminium alloy
<b>FINISH</b>	Anodised



## FEATURES

A heavy duty threshold ramp with a ribbed design which can be positioned back to back to form a two way threshold ramp conforming to NCC Pt. D2.15 Thresholds (b).

Can be used in conjunction with door bottom seals to prevent rain, draughts, noise and smoke infiltration. Suitable for use with most floor pivots.

Ideal for commercial shop fronts providing a neat ramp detail between carpets or tiles at door ways.

Can also be used to provide a ramped frame for internal door mats.

Suitable for door sill applications

Backed by 2 year warranty

## APPROVALS

**UL:** R37913

## ACCESS & MOBILITY

**AUS:** NCC D2.15 & D3.3. AS1428.1

**NZ:** NZ BC Compliance Doc. D1/AS1 1.3.2

**UK/EU:** Approved Document M

## FIRE

**AUS/NZ:** NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1.  
NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.

**UK/EU:** Approved Document B. BS 476 Pt. 20 & 22  
(similar to BS EN 1634-1).

FRL & FRR-/240/30

BAL – FZ when used with a BAL rated door bottom seal  
in accordance with AS3959.

DTAC PTY LTD  
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court  
Port Melbourne Victoria  
Australia 3207

PO Box 5059  
South Melbourne Victoria  
Australia 3205

PEMKO®


T 1300 793 478  
F 1300 780 628

estimating@dtac.com.au  
www.dtac.com.au

© DTAC Pty Ltd 2021

# PEMKO® THRESHOLD RAMP 100X13 INSTALLATION & APPLICATION


**LOCATION** Door sill

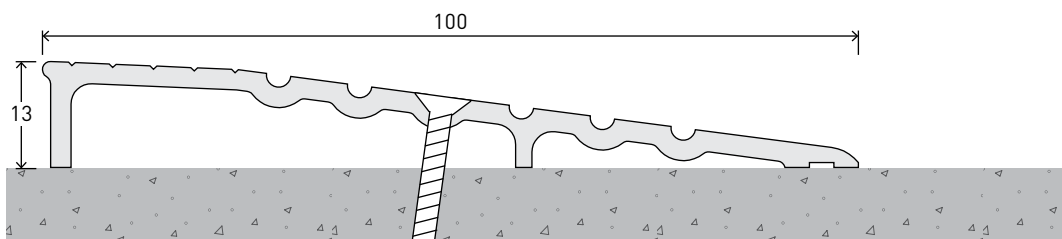

**CODE** DP0771

**SIZE** W100 x H13 - L1000


**FIXING** Screw-fixed (screws supplied)

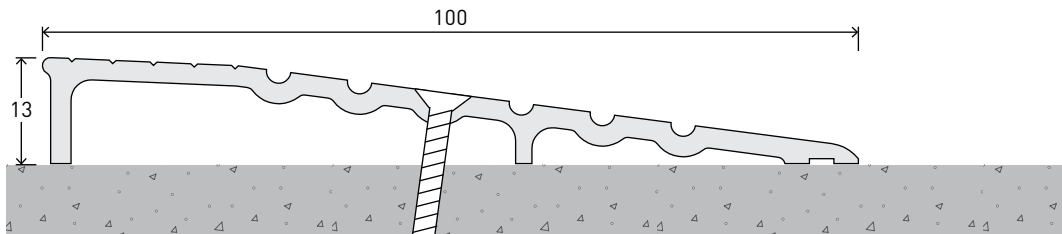

**CODE** DP0772

**SIZE** W100 x H13 - L2000

**FIXING** Screw-fixed (screws supplied)

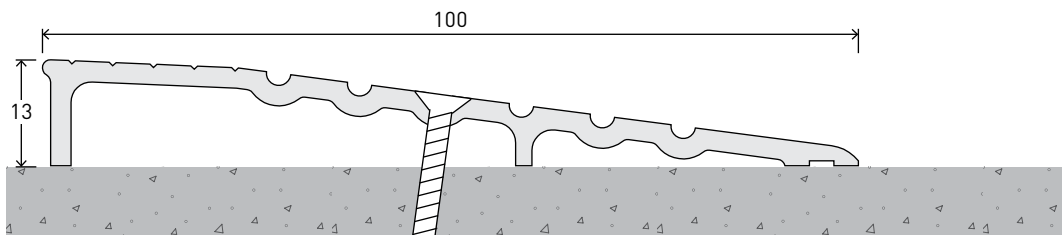

**CODE** DP0773

**SIZE** W100 x H13 - L3000

**FIXING** Screw-fixed (screws supplied)