

PEMKO® CORDUROY EDGING (10x50x3mm)

**P5
GRIP**

PRODUCT CODES: DESCRIPTION:


DE0110C	NATURAL ANODISED
DE0110B	BLACK ANODISED
DE0110G	GOLD ANODISED

RANGE Stair Nosing & Edging

DESIGN Corduroy

MATERIAL 6063 T5 extruded aluminium alloy

LOCATION Indoor or outdoor

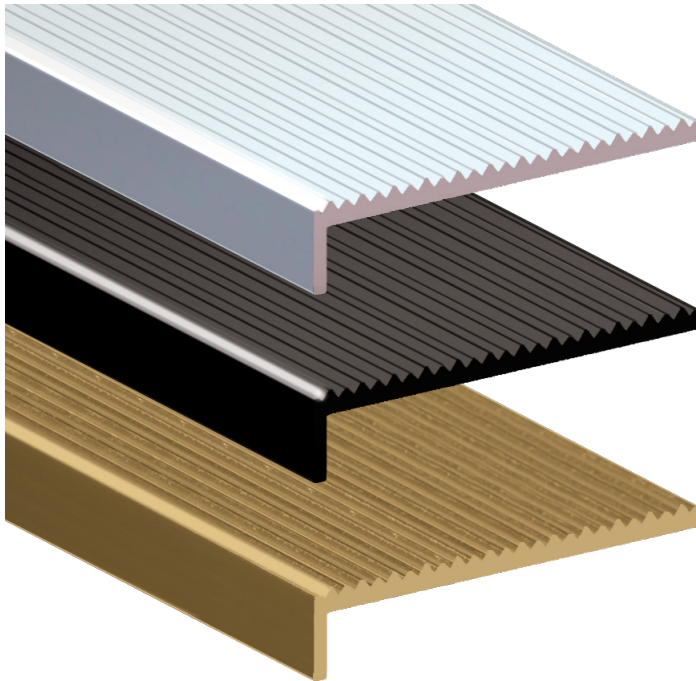

FEATURES & BENEFITS

Extruded continuous corduroy pattern designed by DTAC in Australia

Available in exclusive premium quality flat, angle or carpet profiles

Suitable for all stable finished indoor or outdoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Registered Australian design

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 63 CLASS = P5
TRL 55 SLIDER	= 66 CLASS = P5
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 0.55 CLASS = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= 33° CLASS = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 31.7° CLASS = R12

LUMINANCE TESTING


Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
NATURAL	
LIGHT REFLECTANCE VALUE / WET	= 42.3
LIGHT REFLECTANCE VALUE / DRY	= 41.4
BLACK	
LIGHT REFLECTANCE VALUE / WET	= 2.8
LIGHT REFLECTANCE VALUE / DRY	= 3.4
GOLD	
LIGHT REFLECTANCE VALUE / WET	= 41.9
LIGHT REFLECTANCE VALUE / DRY	= 44.5

PEMKO® CORDUROY EDGING (10x50x3mm) FINISHES & SIZES

AVAILABLE SIZES

HARD NATURAL ANODISED



CODE DE0110C
SIZE H10 x W50 x T3 -
L3200mm

HARD BLACK ANODISED



CODE DE0110B
SIZE H10 x W50 x T3 -
L3200mm

GOLD ANODISED



CODE DE0110G
SIZE H10 x W50 x T3 -
L3200mm

AVAILABLE FINISHES


HARD NATURAL ANODISED (25µM)



HARD BLACK ANODISED (40µM)




GOLD ANODISED (10µM)



PEMKO® CORDUROY EDGING (10x50x3mm) INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DE0110C / DE0110B /
DE0110G

FIXING Adhesive

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0110C / DE0110B /
DE0110G

FIXING Adhesive

NOTE *Ensure grout line is
discrete as illustrated*