

# PEMKO® URBAN EDGING (10x65x5mm)

**P5  
GRIP**

## PRODUCT CODES: DESCRIPTION:


<b>DE0700CY</b>	<b>NATURAL ANODISED</b> Yellow silicon carbide infill
-----------------	--

<b>RANGE</b>	Stair Nosing & Edging
--------------	-----------------------

<b>DESIGN</b>	Urban
---------------	-------

<b>MATERIAL</b>	6063 T5 extruded aluminium alloy with silicon carbide infill
-----------------	--

<b>LOCATION</b>	Indoor or outdoor
-----------------	-------------------

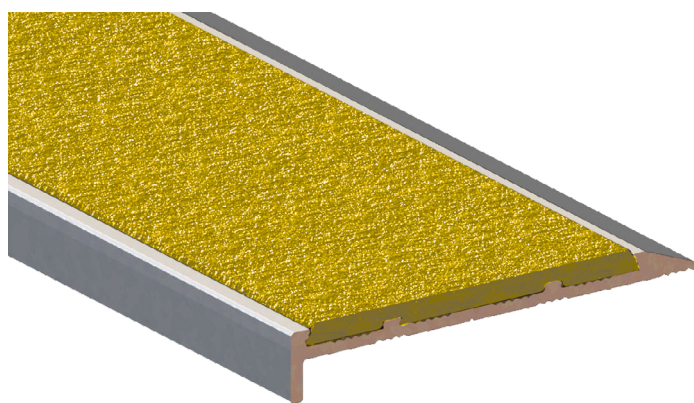

## FEATURES & BENEFITS

Continuous band of hard wearing, solid silicon carbide inserted into aluminium extrusions designed by DTAC in Australia

Available in an exclusive premium quality angle profile

Suitable for all stable finished outdoor or indoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

<b>TEST</b>	AS 4586 APPENDIX A: Wet Pendulum Test
<b>FOUR S 96 SLIDER</b>	= 58 <b>CLASS</b> = P5

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

<b>TEST</b>	AS 1428.1 APPENDIX B PARAGRAPH B3
<b>LIGHT REFLECTANCE VALUE / WET</b>	= 35.9
<b>LIGHT REFLECTANCE VALUE / DRY</b>	= 35.6

# PEMKO®


## URBAN EDGING

(10x65x5mm)

## FINISHES & SIZES

### AVAILABLE SIZES

#### HARD NATURAL ANODISED WITH YELLOW INFILL




**CODE** DE0700CY

**SIZE** H10 x W65 x T5 - L3200mm


### AVAILABLE FINISHES

#### HARD NATURAL ANODISED (25µM) WITH YELLOW INFILL




# PEMKO® URBAN EDGING (10x65x5mm) INSTALLATION & APPLICATION

## SUBSTRATE Stone / Masonry / Timber / Vinyl



**CODE** DE0700CY


**FIXING** Adhesive.  
Optional screw-fix  
(Screws\* and plugs  
available upon request)



**CODE** DE0700CY

**FIXING** Adhesive only


## SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



**CODE** DE0700CY

**FIXING** Adhesive.  
Optional screw-fix  
(Screws\* and plugs  
available upon request)

**NOTE** Ensure grout line is  
discrete as illustrated



**CODE** DE0700CY

**FIXING** Adhesive only

**NOTE** Ensure grout line is  
discrete as illustrated

\* Screw heads will be visible as the  
Silicon Carbide Infill is not a  
removable item.